


# CS Systems Inc.


## New Items! Available Now!!

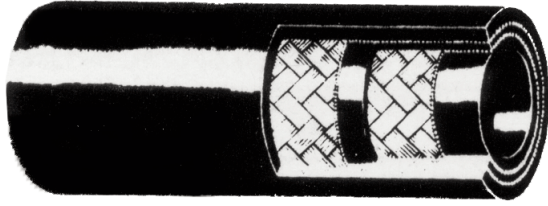

### IMPORT THIN COVER 2-WIRE 2SK EXTREME PRESSURE HYDRAULIC HOSE

**EXCEEDS 2SN/2SC Two Wire Braid No. 2SK**  
 Applications: High Pressure Hydraulics, Industrial or Agricultural  
 Cover: Flame Resistant Cover, MSHA approved  
 Reinforcement: Two Wire Braids  
 Temperature: -40F to +212F (-40C to +100C)  
 Coupling Series: Grip-Crimp pg C1-C9

Hose I.D.	Hose O.D.	Working Pressure (Lbs.)	Min. Burst Pressure (Lbs.)	Min. Bend Radius (In.)	Weight Per Hundred Feet	Reel Footage
1"	1.410	3,250	13,000	6.5	94 lbs.	200'

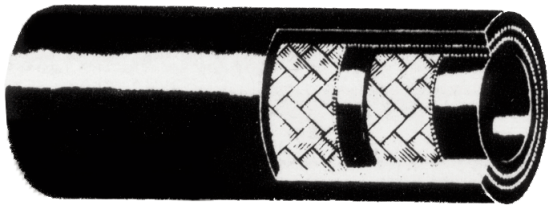

### IMPORT TWO WIRE HI-PRESSURE EXTREMELY FLEXIBLE HYDRAULIC HOSE

**SAE 100R16 No. R16CS**

Applications: High Pressure Hydraulics, Industrial or Agricultural  
 Cover: Flame Resistant Cover, MSHA approved  
 Reinforcement: Two Wire Braids  
 Temperature: -40F to +212F (-40C to +100C)  
 Coupling Series: Vari-Crimp pg B1-B9, Grip-Crimp pg C1-C9

Hose I.D.	Hose O.D.	Working Pressure (Lbs.)	Min. Burst Pressure (Lbs.)	Min. Bend Radius (In.)	Weight Per Hundred Feet	Reel Footage
3/4"	1.090	2,250	9,000	4.8	54 lbs.	250'
1"	1.405	2,000	8,000	6	74 lbs.	200'



NPTF Male Solid				
Hose I.D.	Pipe Size	Thread Size	Hex Size	Part No.
1"	1"	1-11 1/2	1-3/8"	GC01-16x16BR*

\*BR - Brass Stem


NPTF Male Solid				
Hose I.D.	Pipe Size	Thread Size	Hex Size	Part No.
1"	1"	1-11 1/2	1-3/8"	CS01-16X16BR*

\*BR - Brass Stem

Part #	List Price
1" 2SK	8.16
3/4" R16CS	4.20
1" R16CS	6.12
GC01-16x16BR	35.29
CS01-16x16BR	26.86


# 3 Series Thermoplastic Couplings

NPTF Solid Female




Hose I.D.	Pipe Size	Part No.	Die	Pusher
1/4"	1/4"	3-04204	304	FP002

NPTF Male Solid



Hose I.D.	Pipe Size	Part No.	Die	Pusher
1/8"	1/4"	3-02104	302	MP026

Straight O-Ring Face Seal (ORF) Swivel Female




Hose I.D.	Thread Size	Tube O.D.	Part No.	Die	Pusher
1/8"	9/16-18	1/4"	3-02404	302	MP045

# GW SERIES

Bite-to-the-Wire  
100R12 Hydraulic No-Skive Couplings



NPTF Male Solid (API Thread)



Hose I.D.	Pipe Size	Thread Size	Hex Size	Part No.
2"	2"	2-11 1/2	2-1/2"	GWAP 32x32




# 4GC SERIES

BITE-TO-THE-WIRE  
100R12 NO-SKIVE HYDRAULIC COUPLINGS



NPTF Male Solid (API Thread)




Hose I.D.	Pipe Size	Thread Size	Hex Size	Part No.
2"	2"	2-11 1/2	2-1/2"	4GCAP 32x32

Part #	List Price
3-04204	6.28
3-02104	4.86
3-02404	6.00
GWAP-32x32	125.37
4GCAP-32x32	136.00

# R5 SERIES COUPLINGS




Female JIC 37° Swivel

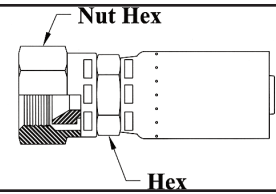


Hose I.D.	Tube Size	Thread Size	Hex Size	Nut Hex	Part No.
13/32"	5/8"	7/8x14	7/8"	1"	R509 8X10

45° Bend JIC/SAE Dual Seat Swivel Female



Hose I.D.	Tube Size	Thread Size	A-Drop Inches	Nut Hex	Part No.
7/8"	1"	1-5/16x12	1.15	1-1/2"	R525-16X16
1-1/8"	1-1/4"	1-5/8x12	1.69	2"	R525-20X20

90° Bend JIC/SAE Dual Seat Swivel Female



Hose I.D.	Tube Size	Thread Size	A-Drop Inches	Nut Hex	Part No.
7/8"	1"	1-5/16x12	2.20	1-1/2"	R526-16X16
1-1/8"	1-1/4"	1-5/8x12	3.25	2"	R526-20X20




# 6GC SERIES

BITE-TO-THE-WIRE  
4SH, R13, R15 No-Skive Hydraulic Couplings




British Standard (BSPP) Female Swivel



Hose I.D.	BSPP Size	Thread Size	Hex Size	Nut Hex	Part No.
5/8"	5/8"	G-5/8-14	15/16"	1-3/16"	6GC10 10x10

Female Swivel DIN 24° Seat (Heavy)  
(O-Ring Included)



Hose I.D.	Tube Size	Thread Size	Hex Size	Nut Hex	Part No.
5/8"	20mm	M30x2.0	1-1/8"	1-1/2"	6GC38 10x20

Part #	List Price
R509-8x10	9.00
R525-16x16	35.71
R525-20x20	72.00
R526-16x16	32.43
R526-20x20	65.40
6GC10-10x10	27.87
6GC38-10x20	27.87