



GW SERIES - Crimp Specifications

Size	Hose	O.D.
3/4"	57MB-2	1.406
1"	57MB-2	1.705

3/4"	R2AT (56MB-2)	1.406
1"	R2AT (56MB-2)	1.705
1-1/4"	R2AT (56MB-2)	2.035

3/4"	2SN	1.406
1"	2SN	1.705
1-1/4"	2SN	2.035
1-1/2"	2SN	2.270
2"	2SN	2.890

1"	WDH17	1.655
----	-------	-------

1-1/2"	R4 (104MB)	2.285
2"	R4 (104MB)	2.895

1/2"	SP580	1.150
5/8"	SP580	1.200
3/4"	SP580	1.406
1"	SP580	1.705
1-1/4"	SP580	2.035
1-1/2"	SP580	2.285
2"	SP580	2.895

Size	Hose	O.D.
1/2"	R12 (RC12B)	1.150
3/4"	R12 (RC12B)	1.406
1"	R12 (RC12B)	1.705
1-1/4"	R12 (RC12B)	2.035
1-1/2"	R12 (RC12B)	2.285
2"	R12 (RC12B)	2.895


1/2"	DHEXR12	1.150
3/4"	DHEXR12	1.406
1"	DHEXR12	1.705
1-1/4"	DHEXR12	2.035
1-1/2"	DHEXR12	2.285
2"	DHEXR12	2.895

1/2"	CS-FLEX 4	1.150
5/8"	CS-FLEX 4	1.200
3/4"	CS-FLEX 4	1.406
1"	CS-FLEX 4	1.705
1-1/4"	CS-FLEX 4	2.035
1-1/2"	CS-FLEX 4	2.285
2"	CS-FLEX 4	2.875

1/2"	CS-FLEX 5	1.150
3/4"	CS-FLEX 5	1.406
1"	CS-FLEX 5	1.705
1-1/4"	CS-FLEX 5	2.035

Size	Hose	O.D.
1/2"	CS-FLEX 6	1.150
3/4"	CS-FLEX 6	1.406
1"	CS-FLEX 6	1.705

1/2"	CS-GUARD FLEX 4	1.150
5/8"	CS-GUARD FLEX 4	1.200
3/4"	CS-GUARD FLEX 4	1.406
1"	CS-GUARD FLEX 4	1.705
1-1/4"	CS-GUARD FLEX 4	2.035
1-1/2"	CS-GUARD FLEX 4	2.285
2"	CS-GUARD FLEX 4	2.875

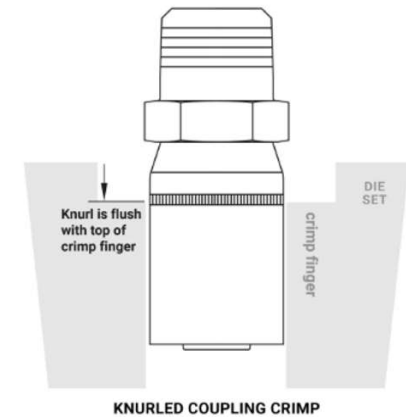

After crimping verify the crimp O.D. with a caliper to ensure proper crimp dimensions. Finished hose crimp tolerance is +/- .005

Rev: 20260210