



T SERIES - Crimp Specifications

Size	Hose	STRAIGHT CRIMP O.D.	BUBBLE CRIMP O.D.
1/4"	RD7	0.485	0.455
5/16"	RD7	0.585	0.555
3/8"	RD7	0.645	0.615

1/4"	RD7NC	0.485	0.455
5/16"	RD7NC	0.585	0.555
3/8"	RD7NC	0.645	0.615

1/4"	RD7TL	0.485	0.455
5/16"	RD7TL	0.585	0.555
3/8"	RD7TL	0.645	0.615

1/4"	RD7TLNC	0.485	0.455
5/16"	RD7TLNC	0.585	0.555
3/8"	RD7TLNC	0.645	0.615


Size	Hose	STRAIGHT CRIMP O.D.	BUBBLE CRIMP O.D.
1/2"	H7	0.840	0.765
3/4"	H7	1.125	1.035
1"	H7	1.385	1.295

1/2"	H7NC	0.840	0.765
3/4"	H7NC	1.125	1.035
1"	H7NC	1.385	1.295

1/2"	H7TL	0.840	0.765
------	------	-------	-------

1/2"	H7TLNC	0.840	0.765
------	--------	-------	-------

3/16"	TR14	0.395	0.355
1/4"	TR14	0.430	0.405
5/16"	TR14	0.490	0.475
3/8"	TR14	0.565	0.545
1/2"	TR14	0.695	0.695
3/4"	TR14	0.995	0.978
1"	TR14	1.225	1.225

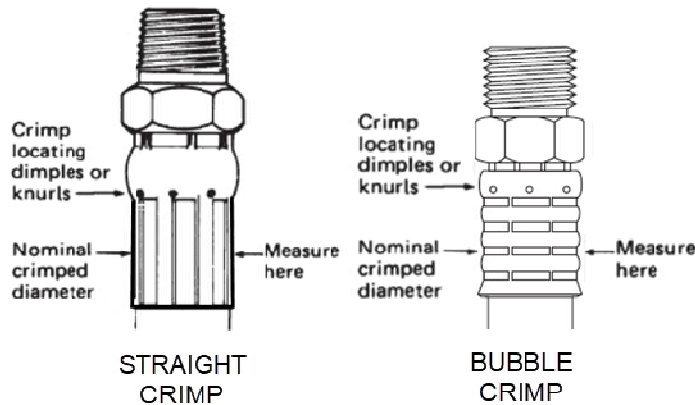

After crimping verify the crimp O.D. with a caliper to ensure proper crimp dimensions.
 Finished hose crimp tolerance is +/- .005